





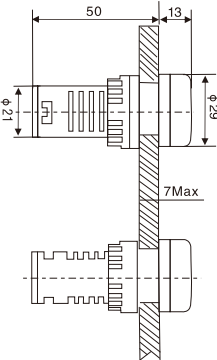
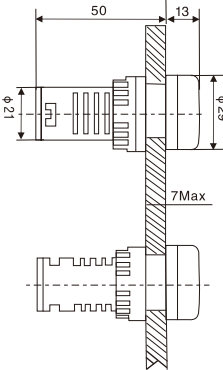


AD103-22
φ22系列信号灯

外形图	名称	型号	颜色	带灯电压	外形尺寸
	B型信号灯	AD103-22B/ 	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W	21 AC/DC 6V 22 AC/DC 12V 23 AC/DC 24V 24 AC/DC 36V 25 AC/DC 48V 26 AC/DC 110V 27 AC/DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	
		AD103-22BS/ 			
	C型信号灯	AD103-22C/ 			
		AD103-22CS/ 			
	D型信号灯	AD103-22D / 			
		AD103-22DS/ 			
	E型信号灯	AD103-22E / 			
		AD103-22ES/ 			

说 明
因散热条件关系，超短型指示灯没有DC220V电压等级。

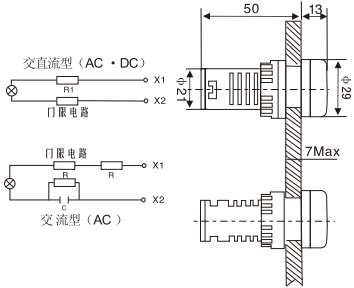
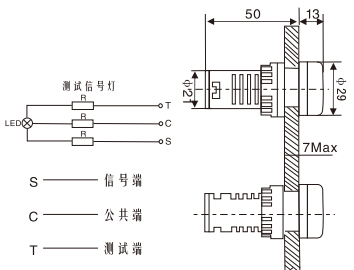

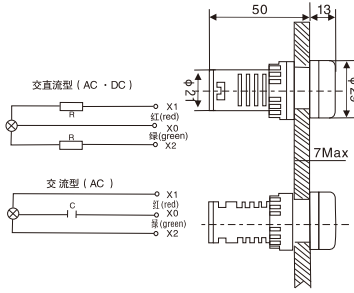

AD103-22
φ 22系列信号灯

外形图	名称	型号	颜色	带灯电压	外形尺寸
	F型信号灯	AD103-22F/ ■ ■	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W	21 AC.DC 6V 22 AC.DC 12V 23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	
	H型信号灯	AD103-22HS/ ■ ■	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W		
	蜂鸣器	AD103-22FM/ ■ ■ A (连续声) AD103-22FM/ ■ ■ B (间断声)	● 黑-K ● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W	22 AC.DC 12V 23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 31 AC 220V 32 AC 380V	
	闪光蜂鸣器	AD103-22SM/ ■ ■ (间断声)	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W		

说 明

- 1、蜂鸣器 音量10cm/80分贝， 电流15-20mA；
- 2、所有信号灯全部为纯色高亮度LED光源。

AD103-22
φ 22系列信号灯



外形图	名称	型号	颜色	灯带电压	外形尺寸
	抗干扰信号灯	AD103-22D/K	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W	21 AC/DC 6V 22 AC/DC 12V 23 AC/DC 24V 24 AC/DC 36V 25 AC/DC 48V 26 AC/DC 110V 27 AC/DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	
	测试信号灯	AD103-22D/T	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W		
	闪光灯	AD103-22S/	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W	21 AC/DC 6V 22 AC/DC 12V 23 AC/DC 24V 24 AC/DC 36V 25 AC/DC 48V 26 AC/DC 110V 27 AC/DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	
	双色灯	AD103-22SS/RG	● 红-R ● 绿-G		
	双色闪光灯	AD103-22S/S	● 红-R ● 绿-G		

说 明




1、抗干扰信号灯一般门限值电压在40V以下，如需更高的门限值请特别说明；
2、建议门限值不要太高，如干扰电压过高，请检查布线情况。
3、双色灯位置指示器全部为纯色高亮度LED光源。

AD103-22



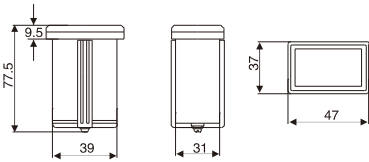
φ 22系列信号灯

外形图	名称	型号	颜色	带灯电压	电气原理图	外形尺寸
	隔离刀闸 位置指示灯	AD103-22WFG/RG	● 红-R ● 绿-G	23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	X0X1通电时 □ 发红光	
		AD103-22WYG/RG			X0X2通电时 □ 发绿光	
	断路器位置 指示灯	AD103-22WFD/RG	● 红-R ● 绿-G		X0X1通电时 ♡ 发红光	
		AD103-22WYD/RG			X0X2通电时 ♡ 发绿光	
	接地位置 指示灯	AD103-22WFN/RG	● 红-R ● 绿-G		X0X1通电时 ☞ 发红光	
		AD103-22WYN/RG			X0X2通电时 ☞ 发绿光	

AD103-22
φ 22系列信号灯

外形图	名称	型号	颜色	带灯电压	电气原理图	外形尺寸
	隔离刀闸 位置指示灯	AD103-22W/G	● 红-R ● 绿-G		X0X1通电时 □ 发红光 X0X2通电时 ▢ 发绿光	
	断路器位置 指示灯	AD103-22W/D	● 红-R ● 绿-G	23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	X0X1通电时 ♡ 发红光 X0X2通电时 ♡ 发绿光	
	接地位置 指示灯	AD103-22W/N	● 红-R ● 绿-G		X0X1通电时 ☶ 发红光 X0X2通电时 ☶ 发绿光	

AD103-22
φ 22系列信号灯

外形图	名称	型号	颜色	灯带电压	外形尺寸
	信号灯	AD103-30D/	● 红-R ● 绿-G ● 黄-Y ● 蓝-B ○ 白-W	22 AC.DC 12V 23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 28 DC 220V 31 AC 220V 32 AC 380V	
	L型信号灯	AD103-22L/			
	光字牌	AD103-39×31		22 AC.DC 12V 23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 28 DC 220V 31 AC 220V	
	光字牌	AD103-77×31		22 AC.DC 12V 23 AC.DC 24V 24 AC.DC 36V 25 AC.DC 48V 26 AC.DC 110V 27 AC.DC 127V 28 DC 220V 31 AC 220V	